




Electric marine toilets

VETUS toilet type WCP is the smallest electric toilet on the market. Owing to its small dimensions and low weight, it may be the ideal replacement for older hand-operated pump toilets.


The specifications are identical with those of the other VETUS 12 or 24 Volt toilets, except that the electronic components are now mounted outside the toilet.

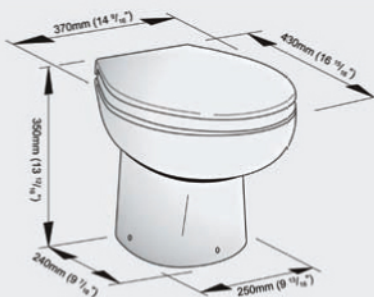

WCP




| | | |
|----------|--------------------|---------|
| SMT02S12 | Toilet type SMT02S | 12 Volt |
| SMT02S24 | Toilet type SMT02S | 24 Volt |
| WCPS12 | Toilet type WCPS | 12 Volt |
| WCPS24 | Toilet type WCPS | 24 Volt |

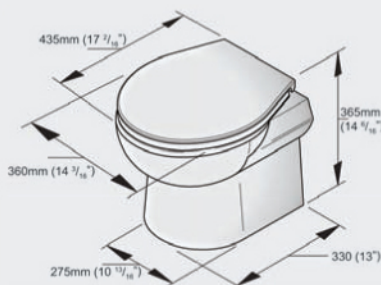

SMT02



This wall mounted toilet provides a solution where floor space is at a premium and enables toilet installation where a floor standing model would be impractical.

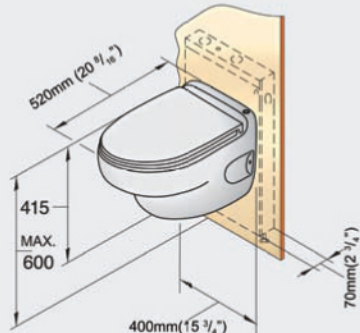

HATO2



| | | |
|----------|-------------------|----------------|
| TMW12 | Toilet type TMW | 12 Volt |
| TMW24 | Toilet type TMW | 24 Volt |
| WCP12 | Toilet type WCP | 12 Volt |
| WCP24 | Toilet type WCP | 24 Volt |
| WC12S2 | Toilet type WCS | 12 Volt |
| WC24S2 | Toilet type WCS | 24 Volt |
| WC220S | Toilet type WCS | 230 Volt 50 Hz |
| WC110S | Toilet type WCS | 120 Volt 60 Hz |
| WC12L2 | Toilet type WCL | 12 Volt |
| WC24L2 | Toilet type WCL | 24 Volt |
| WC220L | Toilet type WCL | 230 Volt 50 Hz |
| WC110L | Toilet type WCL | 120 Volt 60 Hz |
| SMT0212 | Toilet type SMT02 | 12 Volt |
| SMT0224 | Toilet type SMT02 | 24 Volt |
| HATO212B | Toilet type HATO | 12 Volt |
| HATO224B | Toilet type HATO | 24 Volt |
| HATO220 | Toilet type HATO | 230 Volt 50 Hz |
| HATO110 | Toilet type HATO | 120 Volt 60 Hz |

The electronic control panel

- The panel dimensions are 72 mm (2^{13/16}”) x 72 mm (2^{13/16}”) and the build-in depth required is 21 mm (1^{3/16}”).
- The edges of the panel are chromium plated.
- It is supplied with a waterproof gasket and can be easily fitted to a bulkhead.
- It is supplied completely pre-wired and terminates with a plug and 1.5 m (5 ft.) cable. This connects to the 1.5 m (5 ft.) harness and socket supplied with the toilet.
- The panel controls 3 functions: economy flush, normal flush and discharge only.

