



**Stainless steel hatch adjusters (AISI 316)**


Type	Min.length	Max. length
PH	202 mm (7 61/64")	368 mm (14 1/2")
FE	261 mm (10 9/32")	485 mm (19")



**UITSTEL**

**Push-button lock**

Made of plastic with chromium or brass coated push-button.  
 Dimensions: 78 mm (3 5/64") x 45 mm (1 25/32") x 20 mm (1 25/32").

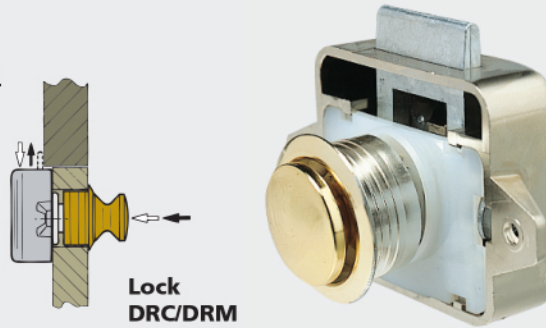

**Lock DRC/DRM**

**LOCKDR**

**Watertight plug and socket**

Watertight plugs and sockets are available in 2 versions:  
 For cable with a cross sectional area up of to 0,75 mm<sup>2</sup> (AWG18) max. 3 Amp. or a larger model for cables of up to 2,5 mm<sup>2</sup> (AWG12) max. 5 Amp. A rubber gasket and a synthetic cover are standard supply.  
 Material: chromium plated brass.



**SC**

**Sump-pump**

A seawater resistant manual sump-pump, for emptying the engine sump, the gearbox, etc. Complete with tubing.



**CARTERP**