




Exhaust systems with water injection from 40 (1 1/7")-152 (6") internal diameter



- DEMPMP40**
- DEMPMP45**
- DEMPMP50**
- DEMPMP60**
- DEMPMP75**
- DEMPMP90**
- DEMPMP100**

Muffler

Available for exhaust hoses of 40 mm (1 9/16"), 45 mm (1 12/16"), or 51 mm (2"), 60 mm (2 6/16"), 75 mm (2 15/16"), 90 mm (3 9/16") or 102 mm (4") I.D. This muffler creates additional mixing of the water inside the exhaust line, which results in even better noise reduction. The construction of the muffler causes almost no resistance to the free flow of the exhaust gases.

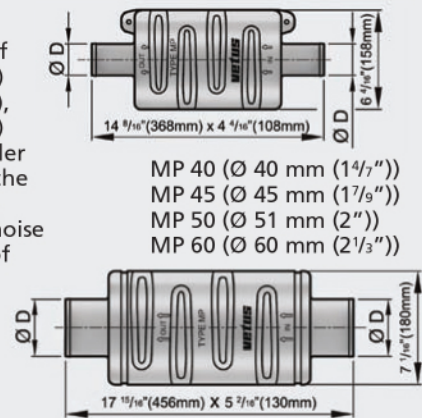


- WLOCKLT40**
- WLOCKLT45**
- WLOCKLT50**
- WLOCKLT60**

Gooseneck

LT 40 / LT 45 / LT 50 / LT 60
 Available for exhaust hose of Ø 40 mm (1 9/16"), Ø 45 mm (1 12/16") Ø 51 mm (2"), Ø 60 mm (2 6/16"),


An engine with a water injection exhaust elbow with an external diameter of 57 mm (2 1/4") may be connected to Ø 60 mm (2 6/16") VETUS exhaust hose. In this case VETUS waterlocks, mufflers, goosenecks and transom connections with a size of Ø 60 mm (2 6/16") can be used as well.

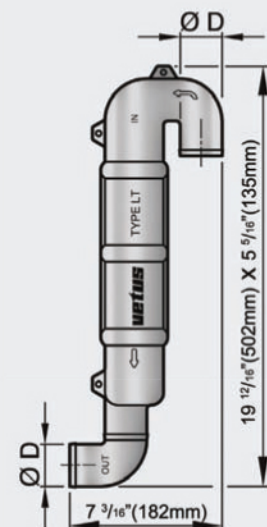

- LT6565**
- LT6575**
- LT7575**
- LT9090**
- LT90110**
- LT110110**
- LT102**
- LT127**
- LT152**

Gooseneck

LT 75 / LT 90-90 / LT 102 / LT 127 / LT 152
 Available for exhaust hose of Ø 76 mm (3"), Ø 90 mm (3 9/16"), Ø 102 mm (4") Ø 127 mm (5") or Ø 152 mm (6") I.D. Stainless steel fastening brackets are supplied as standard with these goosenecks.

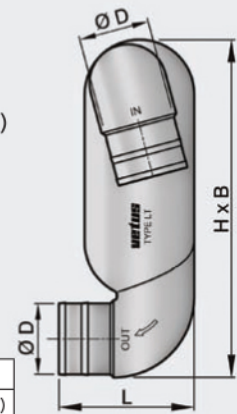

Ø	D	B	L	H
LT 65	65 (3")	235 (9 1/4")	155 (6 1/8")	500 (19 3/4")
LT 75	75 (3")	235 (9 1/4")	155 (6 1/8")	500 (19 3/4")
LT 90	90 (3 1/2")	300 (11 7/8")	210 (8 1/4")	525 (20 3/4")
LT 102	102 (4")	300 (11 7/8")	210 (8 1/4")	525 (20 3/4")
LT 110	110 (4 3/16")	300 (11 7/8")	210 (8 1/4")	525 (20 3/4")
LT 127	127 (5")	380 (15")	275 (10 7/8")	565 (22 1/4")
LT 152	152 (6")	380 (15")	275 (10 7/8")	565 (22 1/4")